
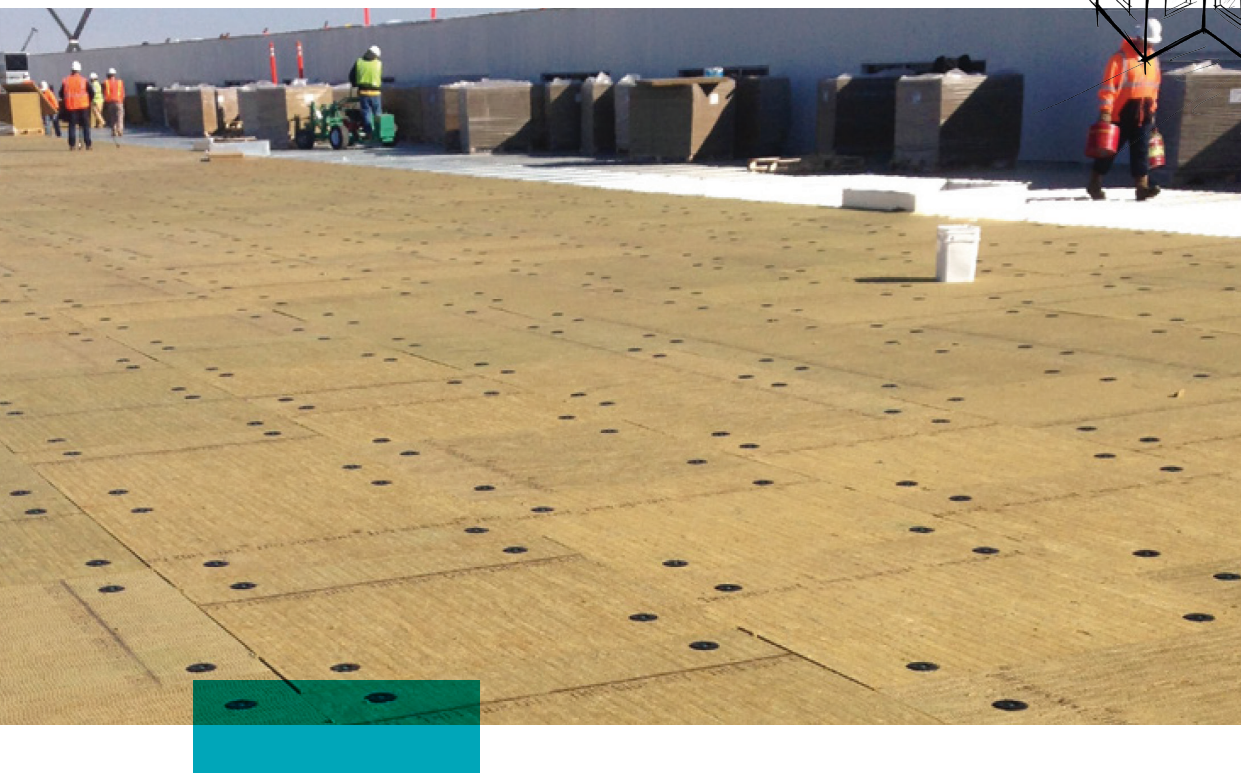


MONOBOARD®

Insulating Coverboard

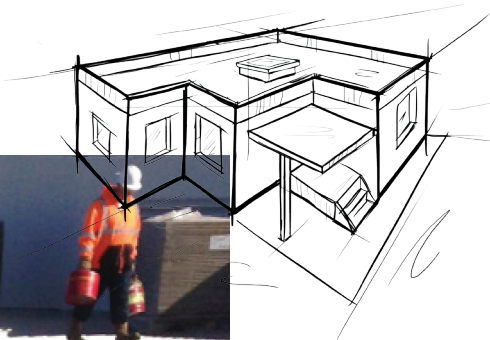

ROCKWOOL MONOBOARD® is a high-density, uncoated stone wool insulating coverboard for low-slope roof applications. It can be used as a re-cover board over existing roof assemblies – providing additional fire and thermal resistance – and is a suitable substrate for mechanically attached systems.


MONOBOARD® provides moisture resistance, chemical resistivity and impact resistance while also being resistant to mold/mildew. The high permeability of the board allows for moisture to migrate through the assembly. It also has excellent acoustic reduction, absorption and impact (rain noise) performance.

Dimensionally stable and providing a long-term, consistent thermal performance, MONOBOARD® is non-combustible and will not warp or cup. Optimally sized for handling, it is also easy to cut and install.

Learn more at rockwool.com

Dimensionally Stable

Low co-efficient of linear expansion means less movement during temperature changes and no shrinking over time causing energy loss.

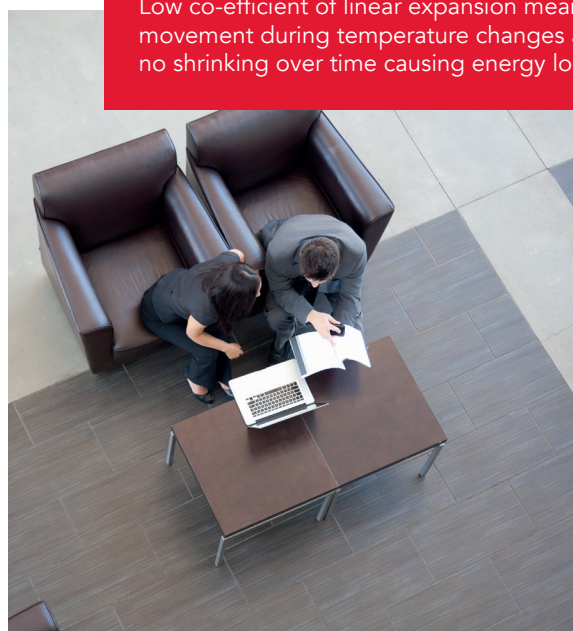

MONOBOARD®

Insulating Coverboard

Technical Data Sheet

Roof Insulation 07220* • Roof Insulation 07 22 00**
Mineral Wool Board Insulation 07 21 13**

ROCKWOOL MONOBOARD® is a high-density, mineral wool insulation board for flat roofing applications.

	Performance								Test Standard
Compliance	Standard Specification for Mineral Fiber Roof Insulation Boards Approval Standard for Single Ply, Polymer Modified Bitumen Sheet, Built-Up Roof and Liquid Applied Roof Assemblies for use in Class 1 and Noncombustible Roof Deck Construction NCC (Non Combustible Core) Rated Roof Insulation								ASTM C726 FM 4470 FM 4470
Reaction to Fire	Flame spread index = 0; Smoke developed index = 0 Flame spread index = 0; Smoke developed index = 0 Determination of Non Combustibility of Building Materials - Non Combustible Standard Method of Fire Tests for Determining Heat Release Rate of Roofing Assemblies with Combustible Above Deck Roofing Components - Class 1 Fire Tests of Roof Coverings - Class A Fire Spread under Roof Deck Assemblies - See ULC Directory Standard Test Methods for Fire Tests of Roof Coverings - Class A Fire Tests of Building Construction and Materials - See UL Directory								ASTM E84 (UL 723) CAN/ULC S102 CAN/ULC S114 NFPA 276 CAN/ULC S107-03 CAN/ULC S126-06 UL 790 (ASTM E108) UL 263 (ASTM E119)
Density	Actual Density - 12.5 lb/ft³ (200 kg/m³)								ASTM C303
Dimensional Stability	Linear Shrinkage - 1.1% @ 1200°F (650°C) Linear Change 7 days @ 40°F (-40°C), ambient RH - 0.0% Linear Change 7 days @ 200°F (93°C), ambient RH - 0.1% Linear Change 7 days @ 158°F (70°C), 97% RH - 0.1%								ASTM C356 ASTM D2126
Hail Performance	Test Standard for Susceptibility to Hail Damage - Class 1 - SH (Severe Hail) Impact Resistance by Impacting with Freezer Ice Balls - Class 4 Impact Resistance of Prepared Roof Covering Materials - Class 4								FM 4470 FM 4473 UL 2218
Thermal Resistance	Mean Temperature 75°F (24°C) 25°F (-4°C) 40°F (4°C) 110°F (43°C)	R-Value 4.0 hr.ft².F/Btu 4.4 hr.ft².F/Btu 4.3 hr.ft².F/Btu 3.7 hr.ft².F/Btu			RSI Value 0.70 m²K/W 0.77 m²K/W 0.75 m²K/W 0.66 m²K/W			ASTM C518 (C177)	
Reaction to Moisture	Moisture Sorption - 0.29% Water Absorption - <1.0% Water Vapor Transmission, Desiccant Method - 2360 ng/Pa.s.m² (41 perm)								ASTM C1104 ASTM C209 ASTM E96
Compressive Strength	11psi (75kPa) @ 10% compression 28psf (190kPa) @ 25% compression								ASTM C165
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed								ASTM C795 ASTM C665
Thickness Dimensions	Nominal - 1" (25.4 mm) Actual - 1.04" (26.4 mm) 48" x 48" (1219 mm x 1219 mm)								
Acoustical Performance	Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000Hz	4000 Hz	NRC	ASTM C423
	1"	0.13	0.49	0.85	0.89	0.89	0.97	0.8	
	Contact ROCKWOOL for STC rated assemblies								ASTM E90



Issued 01-01-18
Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.



8024 Esquesing Line, Milton, ON L9T 6W3
Tel: 800-265-6878 • Fax: 800-991-0110
rockwool.com