


ROCKWOOL® is the registered trademark of ROCKWOOL Group.



ROCKWOOL Flat Roof Insulation



ROCKWOOL CHINA

Factory:

Qingyuan
No.1, Chuangkang Rd, Guangfo Industrial Park,
Fogang County, Qingyuan, Guangdong, P.R.C. (511675)
Tel: 0763-4628899

Yangzhou
No.5, 4th Keyan Rd, Yizheng Econ & Tech
Development Zone, Jiangsu Province (211400)
Tel: 0514-89189988

Beijing
Tel: (+86) 10 6590 6077

Shanghai
Tel: (+86) 21 6211 6725

Guangzhou
Tel: (+86) 20 3839 3636
Fax: (+86) 20 3839 3637

Hong Kong
Tel: (+852) 2754 0877

Taiwan
Tel: (+886) 4 2253 6866

Philippine
Tel: (+63) 2 7710 650
Fax: (+63) 2 7710 649

ROCKWOOL China Hotline: 400 665 0505

RW-CN/FRI-BRO/06-2022/2/EN



www.rockwool.com.cn ROCKWOOL Wechat

Improve Energy Efficiency
Reduce Carbon Footprint
Ensure Sustainable Development



ROCKWOOL Group

We are the world leading stone wool manufacturer, with innovative products and systems, committed to protecting the environment and improving people's life.

ROCKWOOL Group is a global leader in thermal insulation, providing world-class firesafe and thermal insulation products and solutions for building structures. Our products help secure fire safety and reduce energy consumption of buildings, coupled with excellent performance in sound absorption, noise reduction and indoor comfort. ROCKWOOL provides green solutions for the horticulture industry, special engineered stone wool fiber for the manufacturing industry, as well as effective insulation solutions for refining and processing industries, marine and offshore industries and other areas. We also have acoustic and vibration reduction system for modern infrastructure construction.

ROCKWOOL Group has a major market share in Europe, but we have also actively expanded our market in Russia, North America, India and East Asia, with more production, sales and service activities operating locally. ROCKWOOL Group's global network helps promote our products and systems around the world.

Headquartered in Denmark, ROCKWOOL group is a listed company of NASDAQ OMX Nordic exchange Copenhagen. At present, it has 51 manufacturers around the world, nearly 12,000 employees and a sales network of more than 120 countries and regions around the world. At the level of corporate governance, ROCKWOOL has a perfect organizational structure and decision-making mechanism of listed companies, which are supervised and managed by the group's management, the board of directors and the

general meeting of shareholders respectively, and the audit committee and Remuneration Committee ensure the smooth development of the group's business strategy.

In China, ROCKWOOL provides a wide range of products for building insulation and other industrial areas that cater to different applications. We have more than 20 years of exploration and operation in China. ROCKWOOL stone wool is integrated with several excellent strengths: fire resilience, thermal properties, acoustic capabilities, durability and sustainability etc. Our products can stand the test of time. They protect buildings and people in any environment while reducing the carbon footprint. ROCKWOOL protects the environment and makes our society develop with a more sustainable approach.

ROCKWOOL China has an annual stone wool production capacity of 100,000 tons in Qingyuan and Yangzhou, and subsidiaries located in Beijing, Guangzhou, Hong Kong, Taiwan, Philippines and other major cities at present.

100 Times

Energy saved in the life cycle of building application is 100 times than energy consumption during the production.




Introduction

ROCKWOOL roofing boards provide a one stop solution to roofing insulation requirements. They are suitable for new and re-roofing applications on metal deck or concrete deck. ROCKWOOL insulation has proven track records in various international projects. The roofing boards have been developed to offer three types of roofing performances to address the challenges in membrane and metal roofing design for roof designers.


System Description

ROCKWOOL flat roof insulation solutions are specially designed for membrane and metal roof systems.

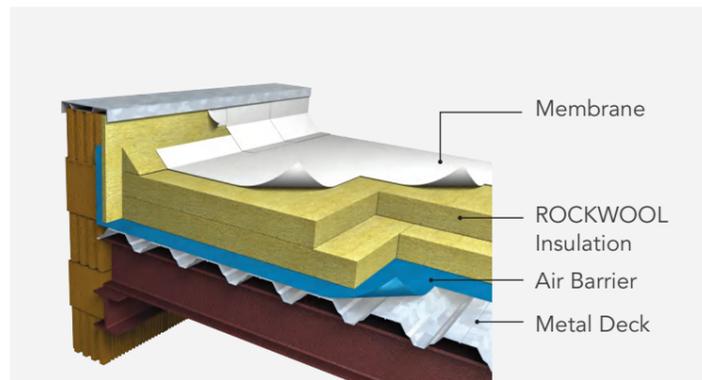


Steel Deck Roof System

ROCKWOOL roofing boards provides an unrivalled fire performance that combines with the excellent mechanical strength to meet all requirements and regulation needs. The superior properties of ROCKWOOL stone wool insulation enhances the overall performance of the membrane roof system in fire, thermal and acoustics, thus producing a durable and energy efficient roofing system. ROCKWOOL roofing boards with mechanically fixed singleply roofing membrane system on metal deck is ideal for commercial and industrial buildings.

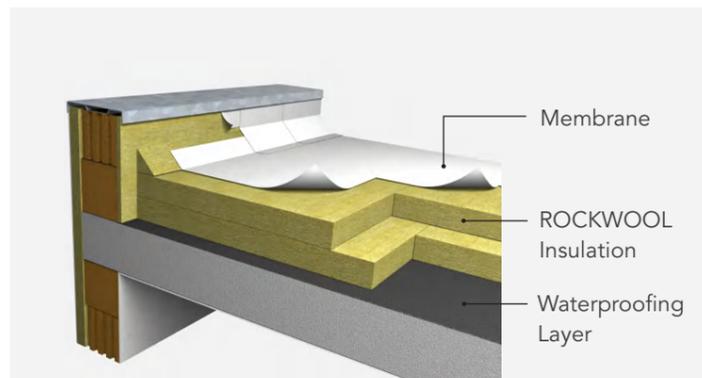

Concrete Deck Roof System

With the high thermal mass of the concrete roof deck, concrete roof have to be adequately protected during summer and winter periods. ROCKWOOL roofing boards provides excellent thermal properties to keep the interior temperature stable and comfortable. Furthermore, ROCKWOOL roofing boards is dimensionally stable and will not be affected by the variation of temperatures over time.

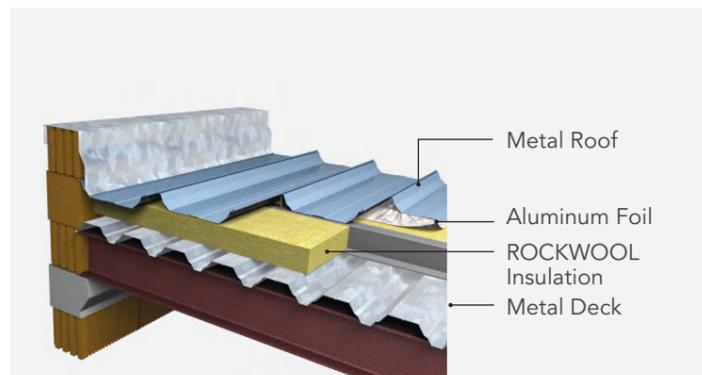

Twin Skin Metal Deck Roof System

The superior sound absorption characteristics of ROCKWOOL roofing boards provides an effective damping of sound resonance within twin skin metal deck. Combined with the added mass of the insulation, ROCKWOOL roofing boards with twin skin metal deck roof system provides an effective acoustic solution for a wide range of applications. ROCKWOOL roofing boards with twin skin metal deck roof system is ideal for educational institutions, airports, convention centres and other buildings where acoustic performance is an important criteria in building performance.

General Insulation Benefits

Mechanical Strength

- ROCKWOOL roofing boards offer high resistance to compression and point loading in order to facilitate periodic maintenance of roof.
- The roofing boards effectively maintain a flat surface to allow rain water draining on the roof surface.

Fire

- ROCKWOOL roofing boards are non-combustible and can withstand at least 1000°C without melting according to DIN 4102-17.
- The roofing boards can effectively impede spread of fire and provide the critical extra minutes for occupants to escape.
- ROCKWOOL insulation also provides the highest Euro Fire Classification, A1 rating according to EN 13501-1, as a non-combustible product.
- ROCKWOOL boards do not produce any burning droplets, promote flashover or release excessive smoke during a fire.

Thermal

- ROCKWOOL roofing boards are dimensionally stable and ensure constant thermal resistance value. The roofingboards do not contain CFC's or HCFC' insulant that could diffuse from the board over time and reduce its R-value.
- The excellent thermal properties of the roofing boards assist the reduction of condensation built-up by the roofing system.
- ROCKWOOL roofing boards are compatible with all types of roofing membrane. No separation layer is required between the roof membrane and insulation to provide for an optimum design.



Acoustic

- The open fibre structure of ROCKWOOL insulation provides excellent sound absorbing properties.
- ROCKWOOL roofing boards are proven as the ideal acoustics insulation material to provide excellent sound insulation and reduced impact noise for flat roof constructions.
- When laid on perforated metal deck lining, the roofing boards are able to control room reverberation and enhance acoustic quality.

Dimensional Stability

- ROCKWOOL roofing boards are made from stone, therefore the thermal coefficient of expansion of the boards is virtually zero.
- The boards do not shrink, warp or deform over time, hence providing the most stable substrate without causing undesirable stress on the roofing membrane.
- The dimensional stability of ROCKWOOL roofing boards eliminates the need for additional mechanical fasteners to prevent differential thermal expansion.


Solutions For Flat Roof Insulation

To provide flexibility in design, cost and usage of membrane roofing system, ROCKWOOL roofing boards offer three different types of roofing insulation system to allow owners, designers and installers to achieve the desired performances of an ideal roof.



FlatRoof Lite

The FlatRoof Lite insulation system offers a cost effective solution to membrane roofs. It satisfies the basic requirement for thermal, acoustic and fire performances. The system introduces HardRock and RoofRock series of products to allow roof designers to achieve the required mechanical performances of the membrane roof system using the combination of both products. In Flatroof lite roof insulation system, RoofRock 30 roofing board with the compression resistance of 40kPa is introduced as the bottom layer of the system. With the superior mechanical strength of HardRock 60 roofing board, the insulation board is employed at the top layer to provide the stability for the overall system.

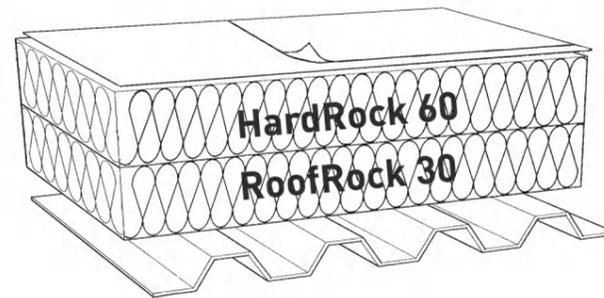

Performance of FlatRoof Lite Solution


Insulation thickness	100 mm
Installation layer / Thickness	Hardrock 60 (Top) / 50mm/Roofrock (Bottom) / 50mm
Thermal Resistance(R-Value, m ² K/W)	2.63
Compression Strength	>40kPa at 10% deformation
Point Load (σ _p)	>500N at 5mm deformation

Technical Specification for RoofRock

Nominal Density	120 kg/m ³
Thermal Conductivity	0.037 W/mK (25°C)
Fire Performance	Non-Combustible,A1
Compression Strength	>40kPa at 10% deformation
Delamination Strength	> 7.5 kPa
Moisture Resistance	Moisture sorption < 1% Vol.
Water Resistance	Short-term water absorption < 0.5kg/m ²
Water Repellency	≥ 99%

FlatRoof Plus

ROCKWOOL FlatRoof Plus insulation system provides superior mechanical strength to meet all challenges on the roof. The 60kPa roofing boards provide resistance to foot traffic during periodic roof maintenance. With ROCKWOOL state-of-the-art technology, HardRock 60 roofing boards delivers the combination of mechanical strength, lighter weight and resistance to fire. When tested to EN 1606, FlatRoof Plus can withstand a permanent load of 3kPa..

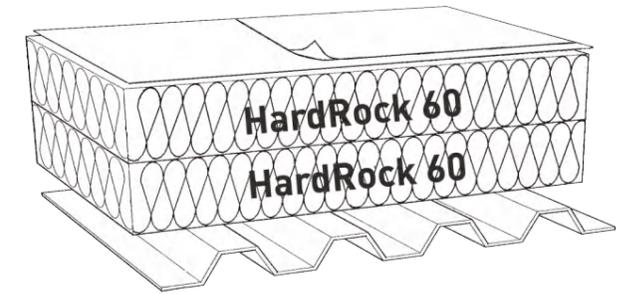


Technical Specification for HardRock 60

Nominal Density	160 kg/m ³
Thermal Conductivity	0.039 W/mK (25°C)
Fire Performance	Non-Combustible, A1
Compression Strength	>60kPa at 10% deformation
Point Load (σ _p)	>500N at 5mm deformation
Delamination Strength	> 7.5 kPa
Moisture Resistance	Moisture sorption < 1% Vol.
Water Resistance	Short-term water absorption <0.5kg/m ²
Water Repellency	≥ 99%

FlatRoof Pro

ROCKWOOL FlatRoof Pro insulation system provides an unsurpassed performance over a range of parameters. The fully tested system provides excellent acoustic performance due to the higher mass and damping ability of the boards.This roofing system is proven with excellent track records in Asia. When tested to EN 1606, Flatroof pro can withstand a permanent load of 4kPa.

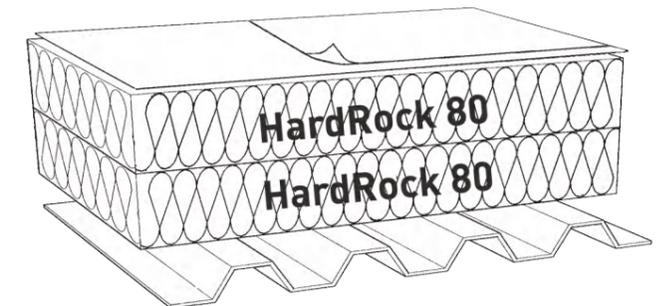

Technical Specification for HardRock 80


Nominal Density	180 kg/m ³
Thermal Conductivity	0.040 W/mK (25°C)
Fire Performance	Non-Combustible, A1
Compression Strength	>80kPa at 10% deformation
Point Load (σ _p)	>700N at 5mm deformation
Delamination Strength	> 7.5 kPa
Moisture Resistance	Moisture sorption<1% Vol.
Water Resistance	Short-term water absorption < 0.5kg/m ²
Water Repellency	≥ 99%

Acoustic Performance

ROCKWOOL stone wool is the ideal material for use in achieving a desired acoustic performance. It is made up of fibroporous basalt stone with air-filled interconnected spaces. This structure gives excellent acoustic properties as it significantly diminishes occurrences of vertical sound waves on adjacent surfaces.

Membrane Roof System

STC 41

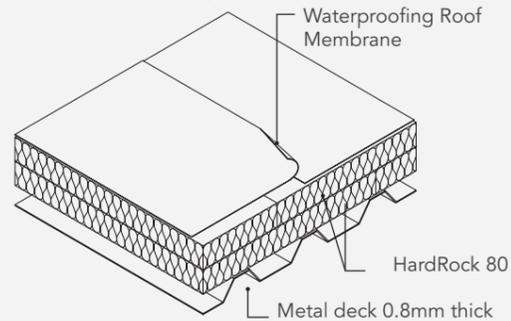


With the high density of ROCKWOOL HardRock roofing boards and the structure of the product, it provides the added mass necessary for effective sound insulation of membrane roof system. Additionally, the single-ply roof membrane coupled with ROCKWOOL stone wool insulation effectively minimizes rain impact noise on the roof system.

1/3 Octave Band Frequency (Hz)	Measured Sound Transmission Loss, TL (dB)
100	20.6
125	19.7
160	21.0
200	25.7
250	32.0
315	34.1
400	37.8
500	40.6
630	41.5
800	41.4
1000	44.4
1250	46.0
1600	46.6
2000	48.6
2500	48.6
3150	47.5
4000	47.0
5000	47.7

For STC 36, 37, 42 and 43 membrane roof systems, please contact your local representative for more details.

Metal Roof System

STC 50

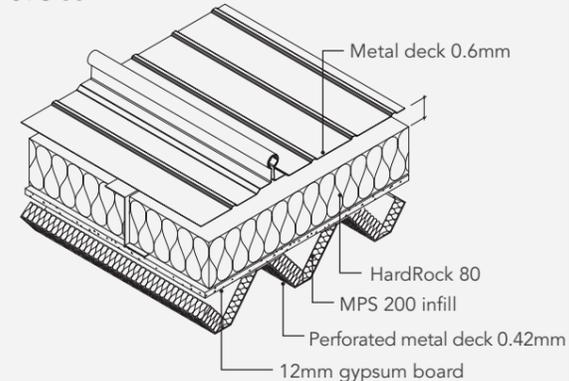

Laboratory testing have proven the added advantage of Hardrock roofing boards in metal roof system. With the high sound absorption characteristics of ROCKWOOL roofing boards, it provides an effective damping of sound resonance within the roofing system. To enhance the quality of sound, ROCKWOOL stone wool infills can be introduced inside the trapezoidal of the perforated metal deck to provide added sound absorption for reverberation control.

1/3 Octave Band Frequency (Hz)	Measured Sound Transmission Loss, TL (dB)
50	14.3
63	10.0
80	18.0
100	21.6
125	29.7
160	31.7
200	34.7
250	39.6
315	43.6
400	47.8
500	50.2
630	53.6
800	57.1
1000	61.6
1250	65.0
1600	70.5
2000	72.5
2500	75.8
3150	74.7
4000	74.8
5000	69.4

For STC 43 and 46 metal roof systems, please contact your local representative for more details.

Thermal Performance

U-Value Calculations for FlatRoof Lite, FlatRoof Plus and FlatRoof Pro Insulation Systems

Insulation System	FlatRoof Lite		FlatRoof Plus		FlatRoof Pro	
Description	HardRock 60 & RoofRock 30*		HardRock 60		HardRock 80	
Insulation Thickness	Metal deck	Concrete deck	Metal deck	Concrete deck	Metal deck	Concrete deck
100	0.359	0.353	0.368**	0.362**	0.377	0.371
120	0.302	0.298	0.309	0.306	0.317	0.313
140	0.260	0.258	0.267	0.264	0.274	0.271
160	0.229	0.227	0.235	0.233	0.241	0.238
180	0.204	0.203	0.210	0.208	0.215	0.213
200	0.184	0.183	0.189	0.188	0.194	0.192

Note:

* For HardRock 60 & RoofRock 30 (FlatRoof Lite) insulation system, the total insulation thickness refers to the combined equivalent thickness of both products (i.e. 100mm thickness comprises of 50mm HardRock 60 & 50mm RoofRock 30)

** refer to sample u-value calculations below

[i] for details of metal deck and concrete deck construction refer to built-up in sample calculations below

[ii] fixings are not taken into consideration in the above calculations

Sample U-Value Calculations For FlatRoof Plus Insulation System

Description	Thickness (mm)	Thermal Conductivity (W/mK)	Metal Deck Thermal Resistance (m ² K/W)	Concrete Deck Thermal Resistance (m ² K/W)
Outside surface resistance, R _{so}	-	-	0.040	0.040
Waterproofing membrane	2.0	0.160	0.013	0.013
Hardrock 60	100	0.039	2.564	2.564
Air Barrier	0.50	0.170	0.003	-
Metal Deck	1.0	50	0.000	-
Concrete Deck	100	2.300	-	0.043
Inside surface resistance, R _{si}	-	-	0.100	0.100
Total Thermal Resistance (R-Value)	-	-	2.720 m ² K/W	2.760 m ² K/W
Total Thermal Transmittance (U-Value)	-	-	0.368 W/m ² K	0.362 W/m ² K




Design Considerations

Clear Span


ROCKWOOL roofing boards between the thickness of 50mm and 59mm shall have the maximum clear span of = thickness of insulation board x 1.5

ROCKWOOL roofing boards between the thickness of 60mm to 100mm shall have the maximum clear span of = thickness of insulation board x 3

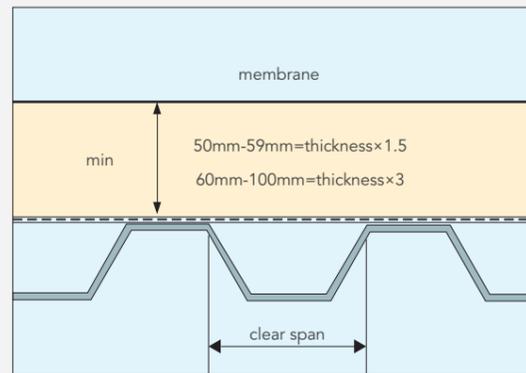

Crown and Trough Position

ROCKWOOL roofing boards must be laid with the long edge at right angles to the profiles of the metal deck. Butt joints can be made freely on the roof, if rules for cantilevering have been adhered to. If cantilevering has not been adhered to butt joints should occur at the mid-crown.

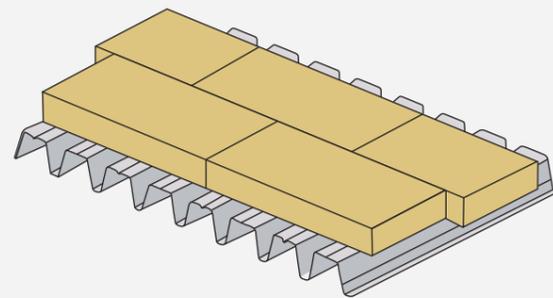


Cantilevering

ROCKWOOL roofing boards of 60 mm or greater thickness may cantilever over a trough, provided that the maximum trough width does not exceed twice the board thickness. For example, 80 mm thick Hardrock roofing board may cantilever over a maximum trough width of 160 mm.

Mechanical Fastening of Insulation


Where the roofing system is mechanically fastened, 2 fasteners per 0.72m² (1200mm x 600mm board size) is recommended for membrane roof system.

For both the field area and the edge region of flat roofs sufficient stability is achieved when using 2 fasteners. However, for the corner region of flat roofs, it is universal practice to increase the number of membrane fasteners per m², and also to reduce the distance between the rows of fasteners.

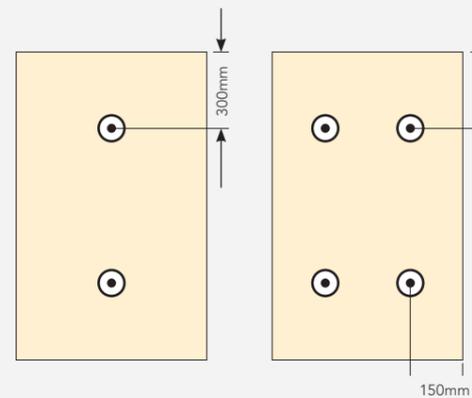

Mechanical Fastening of Insulation for Roof with Curvatures

ROCKWOOL roofing boards can be installed in curved roof with a radius as low as 2.5 m. For application at curved roofs, a minimum of 4 fasteners per board to locate and secure the boards during installation (see under 'mechanical fastening').

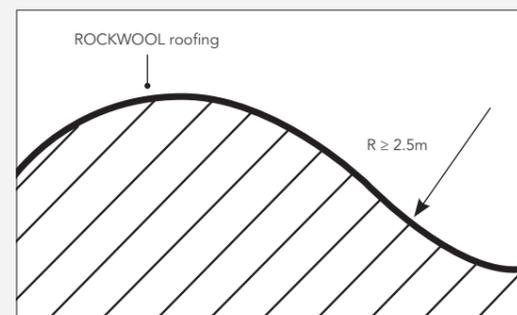


Additional Roof Loads

Plant and Machinery

Wherever possible, any roof-mounted plant, such as air handling and refrigeration units, should be positioned on independent upstands bearing directly onto the substrate.


Where this is not possible and the equipment is to be placed directly onto the finished roof, ROCKWOOL Megarock roofing boards should be used and further protection to spread the load may be required.

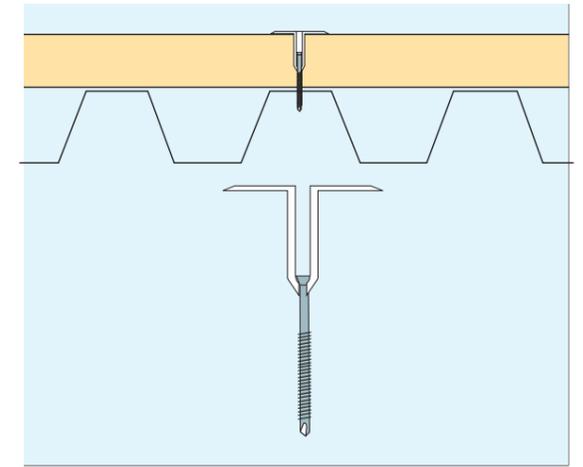

Plastic Tube Fastener

Mechanical Fastening of Roofing Boards

For the mechanical fastening of ROCKWOOL roofing boards to metal, concrete or timber decks, ROCKWOOL Company recommends the use of fasteners incorporating a plastic tube washer.

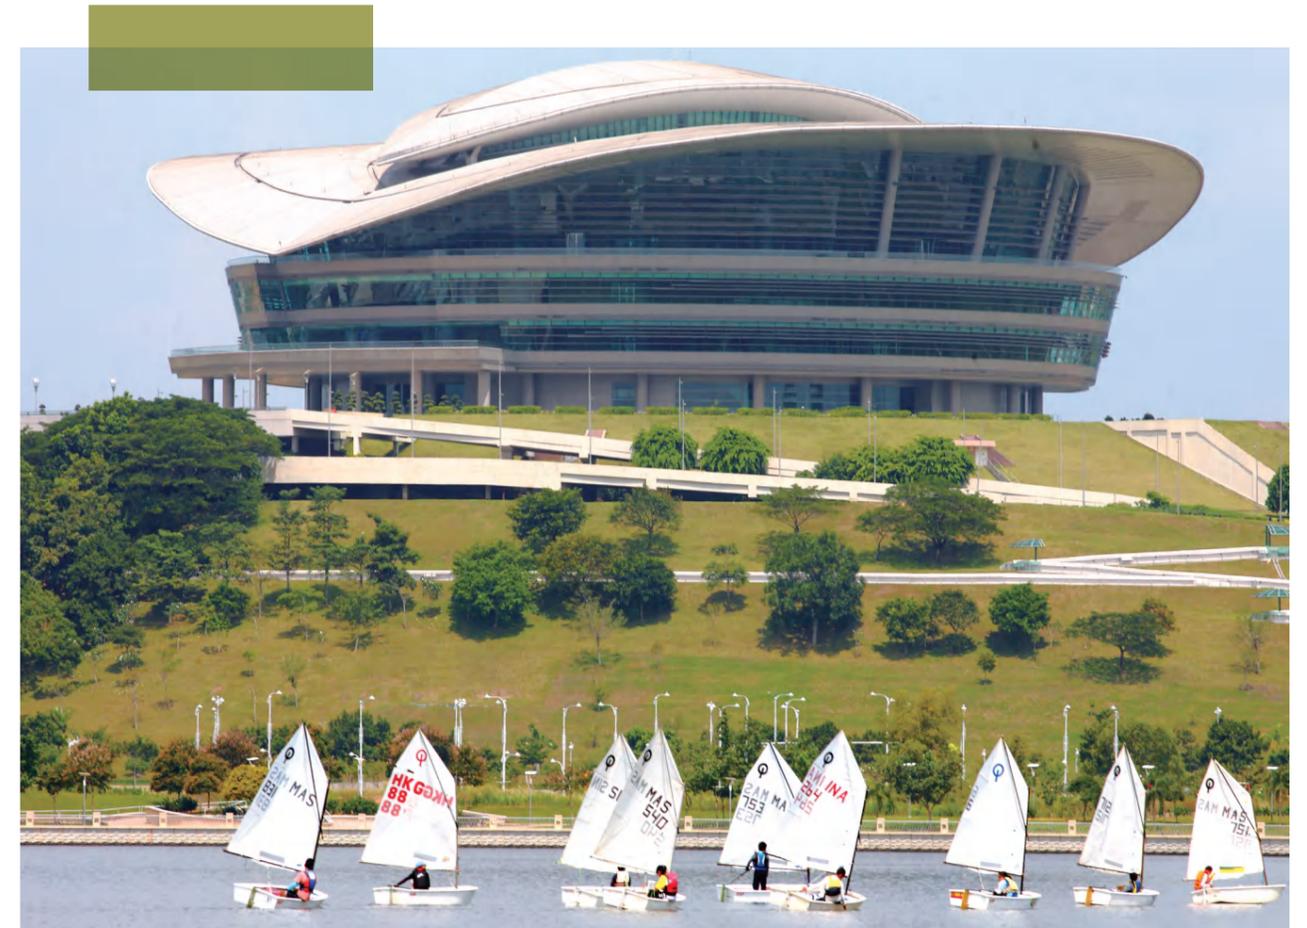


Additional Roof Loads



Intel semiconductor plant, Singapore

Project: Renewable Energy Corporation (REC) plant, Singapore

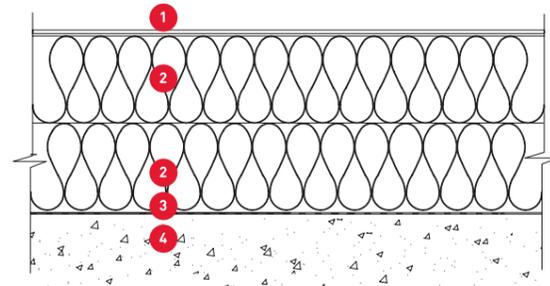


ROCKWOOL FlatRoof Pro Concrete Deck System

- 1 Roof Membrane
- 2 Waterproofing Layer
- 3 Hardrock 80
- 4 Concrete Deck

- ROCKWOOL roofing boards provide an unrivalled combination of thermal, acoustics and fire performances.
- The roofing boards were FM Approved, assuring a high standard of quality products while providing compliance towards insurance requirements.

Project : Ameco A380 Hangar, Beijing, China

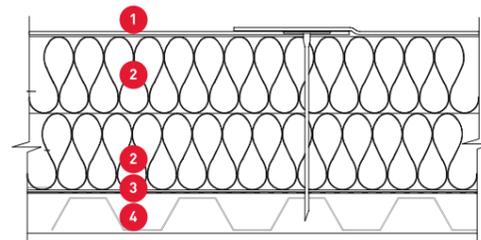

ROCKWOOL FlatRoof Pro Metal Deck System

- 1 Roof Membrane
- 2 Air Barrier
- 3 Hardrock 80
- 4 Trapezoidal Metal Deck

- ROCKWOOL roofing boards have excellent acoustical properties and were able to achieve STC 41.
- The boards were secured with insulation fasteners into the concrete or metal deck, hence allowing fast installation to reduce construction time.



A380 Hangar, Beijing Capital International Airport, China

Sitework

Installation

ROCKWOOL roofing boards should be laid with staggered joints wherever possible and tightly butted to avoid gaps. The use of small pieces of insulation board should be avoided. Care should be taken to clean off all surfaces prior to the laying of insulation boards and membrane. Appropriate stop battens should be installed to protect open edges of boards.

Water Absorption

- ROCKWOOL stone wool consists of randomly oriented waterrepellent fibres. Wetting will therefore only occur in proximity to its surface.
- As the stone wool is diffusion open, boards that become wet during installation must be allowed to dry out naturally, prior to the application of the roof membrane.
- Installation of ROCKWOOL roofing boards during rain should be strictly avoided. Force water such as rain water will penetrate through the product and weaken the wool structure. The installation sequence shall follow the membrane installation. Any exposed insulation boards should immediately be covered with waterproof covering to avoid penetration of rain water.

Cutting Roofing Boards

ROCKWOOL roofing boards are easy to cut or shape using a sharp knife or panel saw. The boards are non-brittle and will not crumble when cut.



Protection of Roofing Boards during Installation

- Adequate temporary protection must be provided above the installed ROCKWOOL roofing boards where any of the following occur: unloading or access points, temporary walkways, stockpiles of roofing materials, waste skips or any other activities that might cause damage to the insulation.
- Under no circumstances should the finished roof be used as a working platform without adequate protection being provided. If an area is required to be designated as a working platform, it is recommended to install ROCKWOOL Megarock around the location.
- ROCKWOOL Company recommends that either the main contractor or the roofing contractor operate a 'permit to work' system for any follow-on trades in areas where the roof installation is complete.

Preparation Work for Refurbishment

Unless the existing roof finish is known to be sound and watertight, all previously applied finishes and, if necessary, insulation layers should be removed. It is recommended that the designer or contractor checks existing levels to ensure that the falls are correct.

Note: The information contained in this brochure is believed to be correct at the date of publication. ROCKWOOL China does not accept responsibility for the consequences of using Hardrock and Roofrock in applications different from those described above.

ROCKWOOL Projects

Project	Location	Application	Product	Time of delivery
Kraft Foods Factory in Beijing	Beijing	Flat roof insulation	HR	2005
Inner Mongolia Tetra Pak Project	Hohhot	Flat roof insulation	HR	2007
Shenzhen IKEA Project	Shenzhen	Flat roof insulation	HR	2007
Nanjing IKEA Project	Nanjing	Flat roof insulation	HR	2008
Dalian Inter (Phase II Project)	Dalian	Flat roof insulation	HR	2008
A380 Hangar.Beijing Capital International Airport	Beijing	Flat roof insulation	HR	2008
Zhenjiang Sandvik Factory	Zhenjiang	Flat roof insulation	HR	2009
Zhuhai GE Aircraft base	Zhuhai	Flat roof insulation	HR	2010
Tianjin Novo Nordisk Project	Tianjin	Flat roof insulation	HR	2010
Huadu CSR maintenance base	Guangzhou	Flat roof insulation	HR	2011
Jiaxing Mars Food Factory	Jiaxing	Flat roof insulation	HR	2013
Samsung Factory	Tianjin	Flat roof insulation	HR	2013
GAC Mitsubishi Motors Automobile Factory	Changsha	Flat roof insulation	HR	2013
Dalian Infiniti Factory	Dalian	Flat roof insulation	HR	2013
Dalian ANSTEEL Factory	Dalian	Flat roof insulation	HR	2014
Shanghai Aircraft Manufacturing Co., Ltd.	Shanghai	Flat roof insulation	HR	2014
Guangzhou Benz Logistic Warehouse	Guangzhou	Flat roof insulation	HR	2014
Kunming Dianchi Lake International Convention and Exhibition Centre	Kunming	Flat roof insulation	HR	2014
Zhengzhou DONGFENG-NISSAN New Plant	Zhengzhou	Flat roof insulation	HR	2015
GAC MOTORS Factory Project	Guangzhou	Flat roof insulation	HR	2015
GAC Chrysler Factory Project	Guangzhou	Flat roof insulation	HR	2015-2016
Hyundai Motor Company Project	Cangzhou/Chongqing	Flat roof insulation	HR	2015-2016
China Aviation Lithium Battery Co.,Ltd Project	Luoyang	Flat roof insulation	TR-DD	2015-2016
Guangzhou Benz Logistic Warehouse Phase II Project	Guangzhou	Flat roof insulation	HR	2017
Xuzhou IKEA Project	Xuzhou	Flat roof insulation	HR	2018
Langfang Grand Theatre	Langfang	Flat roof insulation	HR	2018
Beijing New Airport South Airlines Base	Beijing	Flat roof insulation	HR	2018
CHERY Auto Yibin	Yibin	Flat roof insulation	HR	2018
Chimelong Marine Science Museum	Zhuhai	Flat roof insulation	RR	2019
MAKINO EDM machine production project	Kunshan	Flat roof insulation	HR	2019
IKEA (Changsha, Guiyang, Zhengzhou, Nantong)	Changsha, Guiyang, Zhengzhou, Nantong	Flat roof insulation	HR	2019
Dongan Lake Sports Center three Hall project	Chengdu	Flat roof insulation	RR	2020
Tencent Zhangjiakou cloud computer data center	Zhangjiakou	Flat roof insulation	HR	2020
Chongqing otes phase II plant	Chongqing	Flat roof insulation	HR	2020
Hohhot Tetra Pak packaging project	Hohhot	Flat roof insulation	HR	2021
Guangxi Automobile Group relocation project	Liuzhou	Flat roof insulation	HR	2021
Venetian Hotel - Metal Roof Renovation	Macao	Flat roof insulation	HR/RR	2021

